

FEATURES

Ideal for perimeter wall wash lighting.

Continuous row mounting capability.

Clear, prismatic, acrylic diffuser.

Metal straight blade and parabolic baffles optional.

Available with 1 or 2 lamps.

Uses T8 or T12 lamps.

APPLICATION

*Office Areas
Perimeters
Retail Stores
Corridors
Class Rooms
Libraries*



APPLICATION FEATURES

Mid level, specification grade, recessed lay-in T-bar luminaire. For use in indoor applications where continuous linear lighting is desired such as perimeters. Available in 2 and 4 foot lengths.

CONSTRUCTION

Die formed and spot welded, cold rolled steel housing. Spot-welded for rigidity and clean appearance. Diffuser or baffle lays in directly on to fixture flange on two sides. End caps may be butted together for continuous row mounting. Knockouts are provided on ends for through wiring. Regressed bottom lip available for added rigidity and aesthetic appeal.

MOUNTING

Holes provided for chain mounting support to building structure.

FINISH

Powder painted high reflectance white housing. Pre-painted high reflectance white ballast cover.

OPTICS

Standard diffuser is a clear, prismatic, pattern #12 extruded acrylic lens, designed for high efficiency. Optional shielding is available. Metal baffle louvers are available with straight or parabolic blades, in a variety of sizes and finishes. Optional VF-1 reflectors are made of specular low iridescence, anodized aluminum with a reflectivity of 94% or better.

ELECTRICAL

All electrical components are CSA or UL approved. Lamp holders provided ensure positive lamp retention. The standard voltage is 120V, 60 Hz, or as specified. Other Voltage and frequency ratings are also available. Standard ballasts are electro-magnetic, energy saving where required. See Product Selection for optional ballasts. Sufficient knockouts are provided for connections and through wiring.

APPROVALS

Approved to CSA and UL standards. (UL, or equivalent, marked only when specified.)


OPTIONS

- VF1- 95% reflectance, specular anodized aluminum reflector.
- Asymmetric VF1- 95% reflectance, specular anodized aluminum reflector. (For wall wash)
- Regressed bottom lip.
- 20 gauge welded construction.
- Optional lenses and louvers, see Product Selection.
- No cartons - Bulk packed and wrapped on pallets.
- Electronic ballasts and dimming ballasts, see Product Selection.
- Polycarbonate rotary lock lampholders.


OPTIONAL ADDERS

- Acrylic translucent overlay.
- Emergency lighting power pack.
- Fuse holder.
- Radio interference filter.
- Lamps included but not installed.


REC-66



Standard




Wide

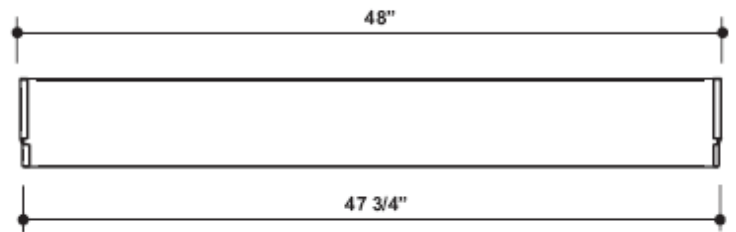

Side View

End View

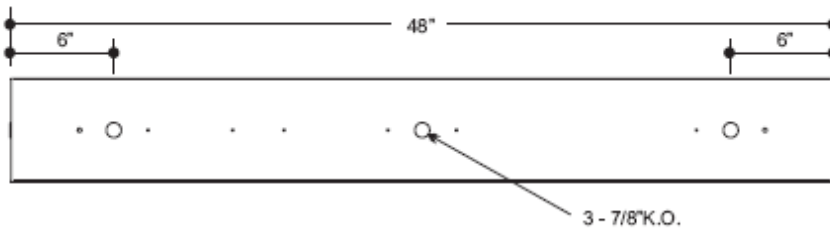

Back View - 4Ft.